
SUPPLY SCOPE (distributor quantities issue, no material prices): Nudura 6.6in XR35 external walls to the eaves, the rear wing and the raked gables - pre-cut by BuildEase, stock forms and accessories by the distributor. Slab, roofs, steels, partitions and joinery are DESIGN ASSUMPTIONS drawn in good faith for coordination only (Wales - Approved Documents) - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION

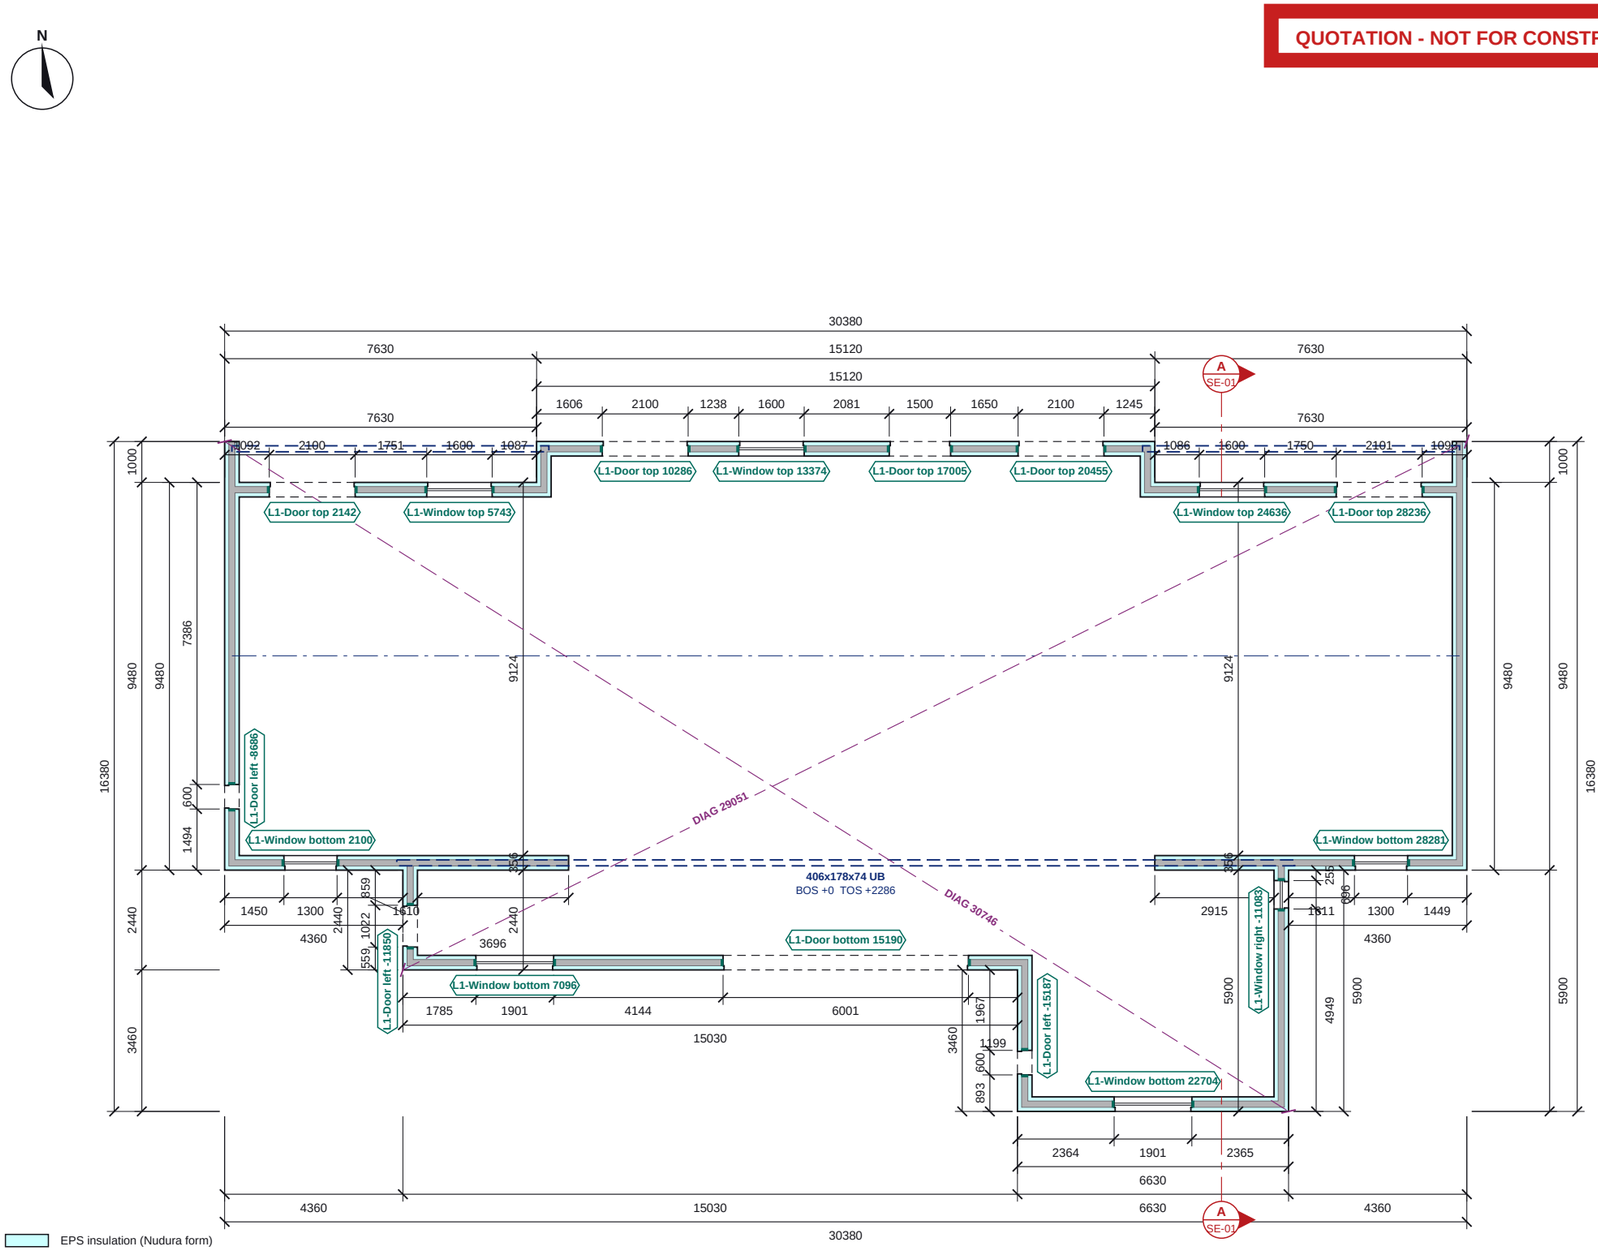

- EPS insulation (Nudura form)
- Concrete core
- End cap at opening
- Steel over (dashed), marked
- Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
- Setting-out check diagonal (external ICF corners)
- Section line (see SE sheet)

GROUND FLOOR ICF PLAN

Scale 1:150 @ A3 | Plan cut at 1200 above GF FFL

0 1 2 3 4 5 6 7 8m

GROUND FLOOR ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
L1-Window bottom 2100	1300	1050	+1050	+2100	-
L1-Window bottom 7096	1901	1350	+750	+2100	-
L1-Door bottom 15190	6001	2100	0	+2100	-
L1-Window bottom 22704	1901	1350	+750	+2100	-
L1-Window bottom 28281	1300	1050	+1050	+2100	-
L1-Door left -8686	600	2100	0	+2100	-
L1-Door left -11850	1022	2100	0	+2100	-
L1-Door left -15187	600	2100	0	+2100	-
L1-Door top 28236	2101	2100	0	+2100	-
L1-Window top 24636	1600	1350	+750	+2100	-
L1-Door top 20455	2100	2100	0	+2100	-
L1-Door top 17005	1500	2100	0	+2100	-
L1-Window top 13374	1600	1350	+750	+2100	-
L1-Door top 10286	2100	2100	0	+2100	-
L1-Window top 5743	1600	1350	+750	+2100	-
L1-Door top 2142	2100	2100	0	+2100	-
L1-Window right -11083	696	1050	+1050	+2100	-

Structural openings in the ICF; sill and head above GF FFL.

STEEL SCHEDULE

Mark	Section (engineer)	BOS	TOS
-	406x178x74 UB S355	+0	+2286

BOS / TOS = bottom / top of steel above GF FFL (C-1 columns: base / top).

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. No structural design issued. 6.6in XR35 walls from the pre-application drawings; lintels over the openings, the porch eaves beams (7.17 m), the open main south eaves line and the roof loads for the engineer.
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.
6. Steel over dashed. BOS / TOS = bottom / top of steel above GF FFL.
7. Datum: 0 = FFL = top of slab (ICF on slab). Ground 150 below FFL. Eaves plate 2,286, rear wing flat roof 2,743.
8. From pre-application drawings 26.317.04-07 (no sections, no levels): heights scaled from the 1:100 elevations - to be confirmed by the architect and the engineer.
9. External walls drawn 456 overall - modelled as Nudura 6.6in XR35 on the drawn outer face.

REVISIONS

REV	DATE	DESCRIPTION
-	10.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
Insubloc (distributor)	Tyn Y Bonau Road, Pontarddulais - GS6 / FCHA, Blocks A + B

DRAWING TITLE

GROUND FLOOR ICF GENERAL ARRANGEMENT - BLOCK A

ICF walls, openings, lintels, steel over and engineer's notes

SCALE	SIZE	DATE
1:150	A3	10.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-090-GA-01A	-

Do not scale. All dimensions in millimetres; levels in metres from GF FFL. Check all dimensions on site.