

SUPPLY SCOPE (distributor quantities issue, no material prices): Nudura 6.6in XR35 external walls to the eaves, the rear wing and the raked gables - pre-cut by BuildEase, stock forms and accessories by the distributor. Slab, roofs, steels, partitions and joinery are DESIGN ASSUMPTIONS drawn in good faith for coordination only (Wales - Approved Documents) - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION

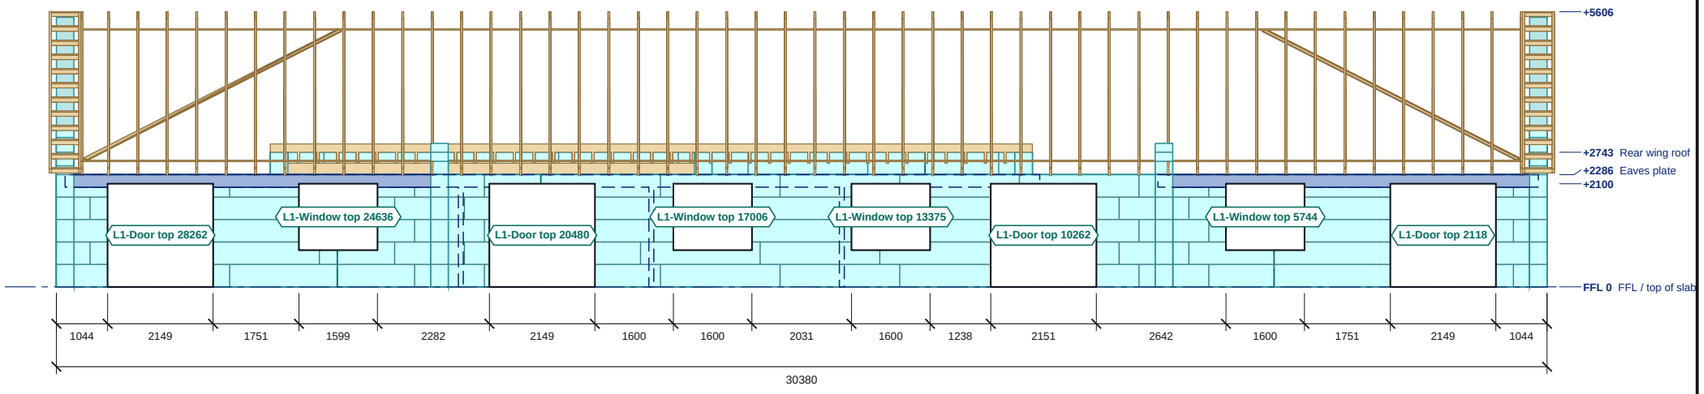

SOUTH EAST ELEVATION (ENTRANCES)

Scale 1:125 @ A3 | Levels above GF FFL; sills and heads in the schedule

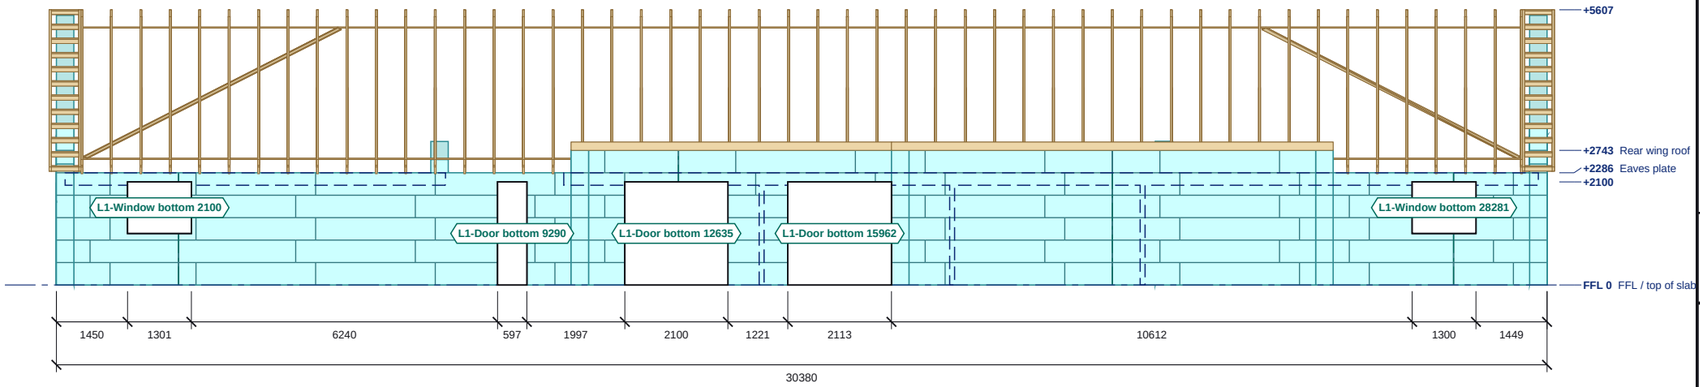

NORTH WEST ELEVATION (REAR WING)

Scale 1:125 @ A3 | Levels above GF FFL; sills and heads in the schedule

ICF external EPS face
Block course joint
Stack joint

0 1 2 3 4 5m

ELEVATION SCHEDULES

SOUTH EAST ELEVATION (ENTRANCES): OPENINGS

Ref	Width	Height	Sill	Head	Lintel
L1-Door top 20480	2149	2100	0	+2100	-
L1-Window top 17006	1600	1350	+750	+2100	-
L1-Window top 13375	1600	1350	+750	+2100	-
L1-Door top 10262	2151	2100	0	+2100	-
L1-Door top 28262	2149	2100	0	+2100	-
L1-Window top 24636	1599	1350	+750	+2100	-
L1-Window top 5744	1600	1350	+750	+2100	-
L1-Door top 2118	2149	2100	0	+2100	-

Structural openings in the ICF; sill and head above GF FFL.

NORTH WEST ELEVATION (REAR WING): OPENINGS

Ref	Width	Height	Sill	Head	Lintel
L1-Door bottom 12635	2100	2100	0	+2100	-
L1-Door bottom 15962	2113	2100	0	+2100	-
L1-Window bottom 2100	1301	1050	+1050	+2100	-
L1-Door bottom 9290	597	2100	0	+2100	-
L1-Window bottom 28281	1300	1050	+1050	+2100	-

Structural openings in the ICF; sill and head above GF FFL.

SOUTH EAST ELEVATION (ENTRANCES): LEVELS

Level	FFL
FFL / top of slab	0
top of ICF	+2100
Eaves plate	+2286
Rear wing roof	+2743
top of roof build-up	+5606

NORTH WEST ELEVATION (REAR WING): LEVELS

Level	FFL
FFL / top of slab	0
top of ICF	+2100
Eaves plate	+2286
Rear wing roof	+2743
top of roof build-up	+5607

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
2. Levels above GF FFL. Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
3. ICF walls as modelled.
4. See ES26-090-GA-01 for plan setting out, lintels and steel.
5. Datum: 0 = FFL = top of slab (ICF on slab). Ground 150 below FFL. Eaves plate 2,286, rear wing flat roof 2,743.
6. From pre-application drawings 26.317.04-07 (no sections, no levels): heights scaled from the 1:100 elevations - to be confirmed by the architect and the engineer.
7. External walls drawn 456 overall - modelled as Nudura 6.6in XR35 on the drawn outer face.

REVISIONS

REV	DATE	DESCRIPTION
-	10.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
Insubloc (distributor)	Tyn Y Bonau Road, Pontarddulais - GS6 / FCHA, Blocks A + B

DRAWING TITLE

NORTH WEST AND SOUTH EAST ELEVATIONS - BLOCK B

ICF elevations with openings, levels and roof build-up

SCALE	SIZE	DATE
1:125	A3	10.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-090-EL-01B	-

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.