
SUPPLY SCOPE (distributor quantities issue, no material prices): Nudura 6.6in XR35 external walls to the eaves, the rear wing and the raked gables - pre-cut by BuildEase, stock forms and accessories by the distributor. Slab, roofs, steels, partitions and joinery are DESIGN ASSUMPTIONS drawn in good faith for coordination only (Wales - Approved Documents) - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION

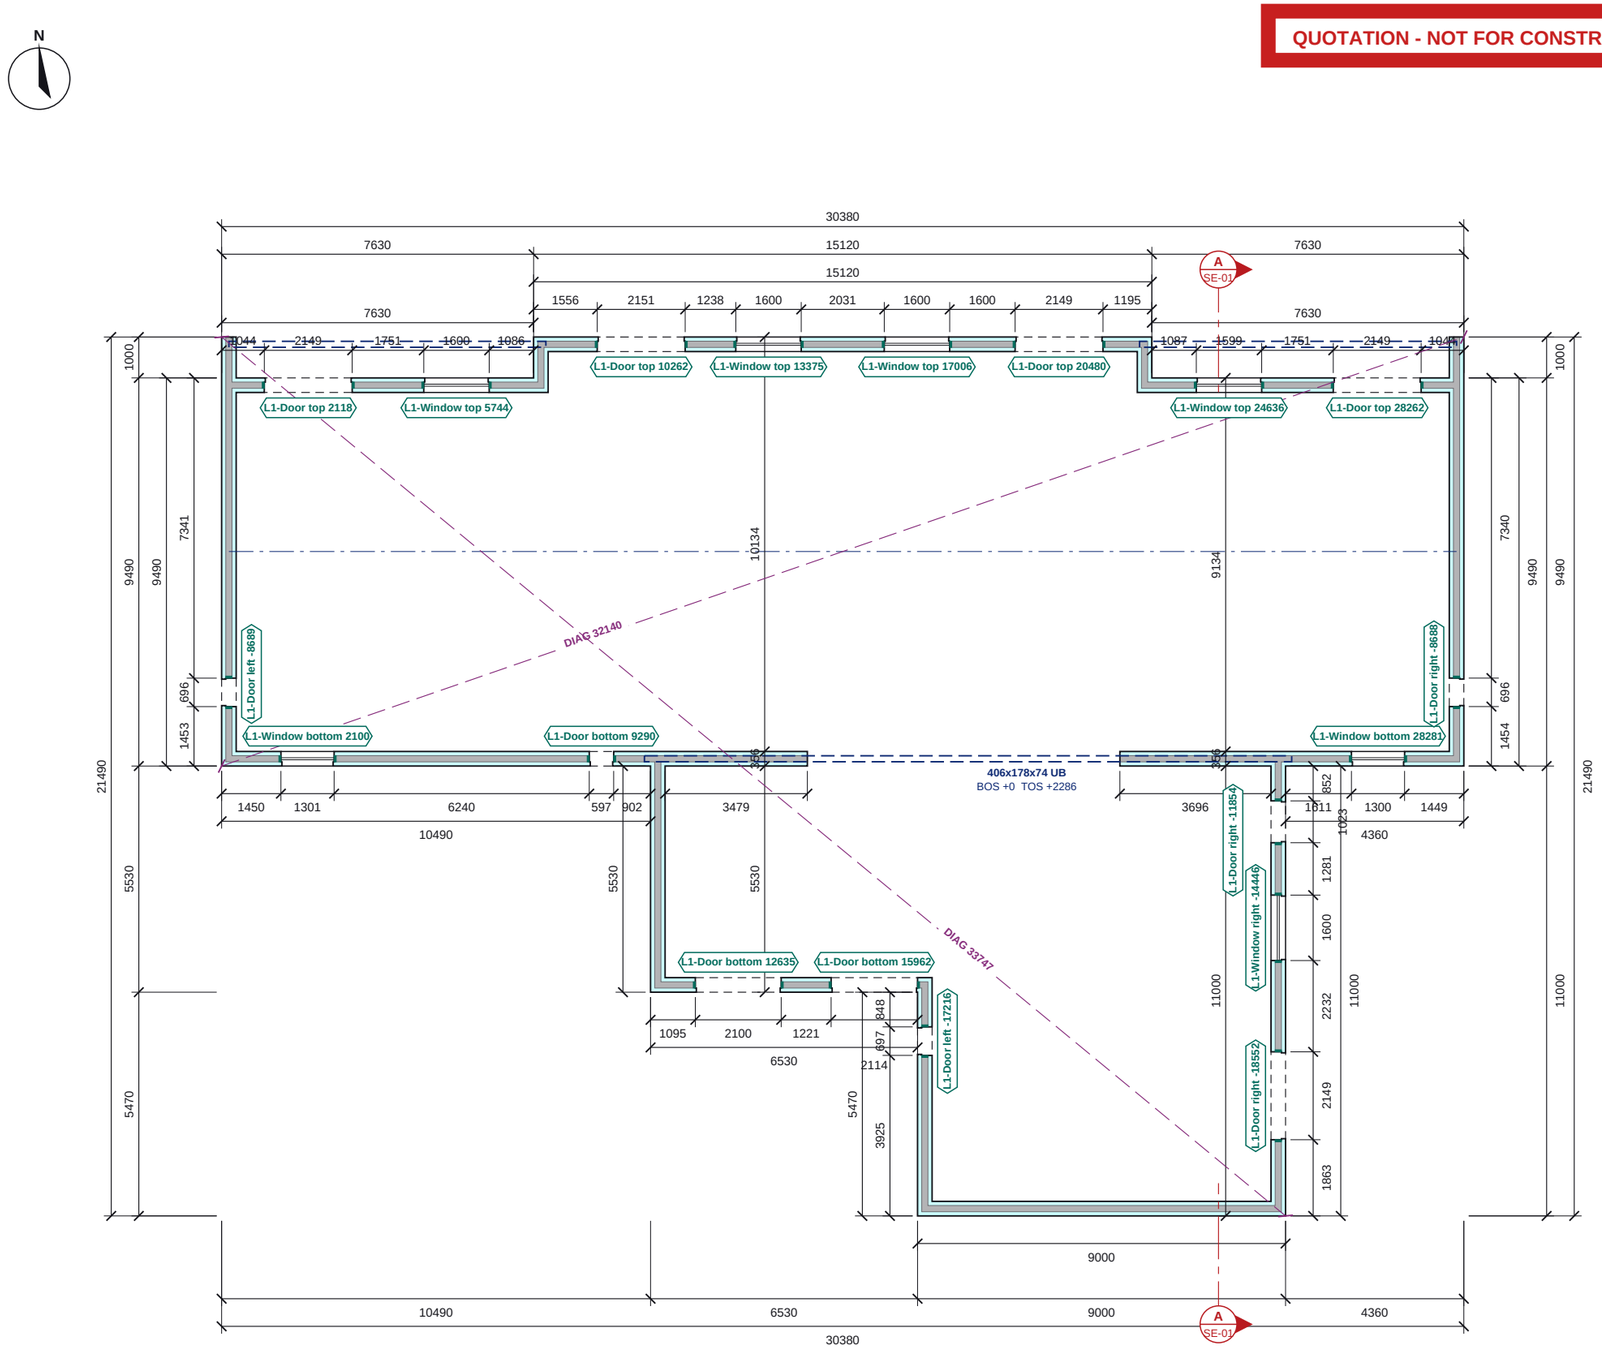

EPS insulation (Nudura form)
Concrete core
End cap at opening
Steel over (dashed), marked
Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
Setting-out check diagonal (external ICF corners)
Section line (see SE sheet)

GROUND FLOOR ICF PLAN

Scale 1:150 @ A3 | Plan cut at 1200 above GF FFL

0 1 2 3 4 5 6 7 8m

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

GROUND FLOOR ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
L1-Window bottom 2100	1301	1050	+1050	+2100	-
L1-Door bottom 9290	597	2100	0	+2100	-
L1-Door bottom 12635	2100	2100	0	+2100	-
L1-Door bottom 15962	2113	2100	0	+2100	-
L1-Window bottom 28281	1300	1050	+1050	+2100	-
L1-Door left -8689	696	2100	0	+2100	-
L1-Door left -17216	697	2100	0	+2100	-
L1-Door top 28262	2149	2100	0	+2100	-
L1-Window top 24636	1599	1350	+750	+2100	-
L1-Door top 20480	2149	2100	0	+2100	-
L1-Window top 17006	1600	1350	+750	+2100	-
L1-Window top 13375	1600	1350	+750	+2100	-
L1-Door top 10262	2151	2100	0	+2100	-
L1-Window top 5744	1600	1350	+750	+2100	-
L1-Door top 2118	2149	2100	0	+2100	-
L1-Door right -18552	2149	2100	0	+2100	-
L1-Window right -14446	1600	1050	+1050	+2100	-
L1-Door right -11854	1023	2100	0	+2100	-
L1-Door right -8688	696	2100	0	+2100	-

Structural openings in the ICF; sill and head above GF FFL.

STEEL SCHEDULE

Mark	Section (engineer)	BOS	TOS
-	406x178x74 UB S355	+0	+2286

BOS / TOS = bottom / top of steel above GF FFL (C-1 columns: base / top).

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. No structural design issued. 6.6in XR35 walls from the pre-application drawings; lintels over the openings, the porch eaves beams (7.17 m), the open main south eaves line and the roof loads for the engineer.
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.
6. Steel over dashed. BOS / TOS = bottom / top of steel above GF FFL.
7. Datum: 0 = FFL = top of slab (ICF on slab). Ground 150 below FFL. Eaves plate 2,286, rear wing flat roof 2,743.
8. From pre-application drawings 26.317.04-07 (no sections, no levels): heights scaled from the 1:100 elevations - to be confirmed by the architect and the engineer.
9. External walls drawn 456 overall - modelled as Nudura 6.6in XR35 on the drawn outer face.

REVISIONS

REV	DATE	DESCRIPTION
-	10.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
Insubloc (distributor)	Tyn Y Bonau Road, Pontarddulais - GS6 / FCHA, Blocks A + B

DRAWING TITLE

GROUND FLOOR ICF GENERAL ARRANGEMENT - BLOCK B

ICF walls, openings, lintels, steel over and engineer's notes

SCALE	SIZE	DATE
1:150	A3	10.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-090-GA-01B	-